


Type 1

Engine Exhaust Silencers

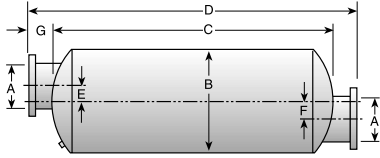

End-In, End-Out Design

- Industrial Grade**
12–18 dB attenuation
- Residential Grade**
18–25 dB attenuation
- Critical Grade**
25–35 dB attenuation
- Hospital Grade**
35–42 dB attenuation

Part Number	A Nominal Inlet Diameter	B Outside Body Diameter	C Body Length	D Overall Length	E Offset to C/L	F Offset to C/L	G Inlet Length
41120P	2.0	7.6	22.8	26.6	—	—	1.8
41125P	2.5	8.1	27.2	32.6	—	—	2.7
41130P	3.0	8.5	31.1	36.6	—	—	2.7
41135P	3.5	9.0	32.8	37.6	—	—	2.4
41140*	4.0	10.1	32.2	38.0	2.30	2.30	2.9
41150F	5.0	12.1	32.3	37.9	2.80	2.80	2.8
41160F	6.0	14.1	32.9	38.4	3.40	3.40	2.8
41180F	8.0	18.1	48.8	58.0	—	—	4.6
41182F	10.0	22.1	50.6	58.0	—	—	3.7
41184F	12.0	22.2	65.6	73.0	—	—	3.7
41186F	14.0	36.2	70.6	76.0	—	—	2.7
41188F	16.0	42.2	84.2	90.8	—	—	3.3
41199F	18.0	42.2	96.2	103.0	—	—	3.4
41121F	20.0	48.3	98.4	104.0	—	—	2.8
41122F	22.0	54.3	99.6	107.3	—	—	3.9
41220P	2.0	8.1	31.7	35.6	1.25	1.25	1.9
41225P	2.5	9.0	38.8	42.8	1.50	1.50	2.0
41230P	3.0	10.1	38.2	44.0	2.75	2.75	2.9
41235P	3.5	10.1	44.2	50.0	2.06	2.06	2.9
41240*	4.0	10.1	49.2	55.0	2.31	2.31	2.9
41250F	5.0	14.1	43.5	51.4	3.61	3.61	4.0
41260F	6.0	14.1	57.5	65.4	3.60	3.60	4.0
41280F	8.0	22.2	56.6	64.0	—	—	3.7
41282F	10.0	22.2	84.7	92.0	—	—	3.7
41284F	12.0	26.2	79.7	87.0	—	—	3.7
41286F	14.0	36.2	94.6	101.0	—	—	3.2
41288F	16.0	42.2	108.2	115.0	—	—	3.4
41299F	18.0	42.3	108.2	114.9	—	—	3.3
41221F	20.0	48.3	134.1	140.1	—	—	3.0
41222F	22.0	54.3	135.5	143.2	—	—	3.9
41307P	0.75	4.2	21.3	23.8	—	—	1.3
41310P	1.00	5.0	23.4	27.0	0.75	0.72	1.8
41313P	1.25	6.1	27.5	31.2	—	—	1.8
41315P	1.50	8.1	30.7	34.6	—	—	1.9
41320P	2.00	9.0	40.8	44.0	—	—	1.6
41325P	2.50	10.1	47.2	52.0	—	—	2.4
41330P	3.00	11.1	49.5	55.6	—	—	3.1
41335P	3.50	12.1	51.3	57.0	—	—	2.3
41340*	4.00	12.1	58.3	64.0	1.80	1.80	2.9
41350F	5.00	14.1	63.5	71.4	2.60	2.60	4.0
41360F	6.00	16.1	72.0	80.8	2.00	2.00	4.4
41380F	8.00	22.1	78.7	86.0	—	—	3.7
41382F	10.00	26.2	79.7	87.0	—	—	3.7
41384F	12.00	30.2	104.8	112.0	—	—	3.6
41386F	14.00	42.2	108.2	115.0	—	—	3.4
41388F	16.00	42.2	156.2	163.0	—	—	3.4
41399F	18.00	48.2	133.9	139.9	—	—	3.1
41321F	20.00	54.3	159.6	165.5	—	—	3.3
41322F	22.00	60.3	161.3	166.8	—	—	2.8
41440F	4.0	14.1	66.5	72.0	4.00	4.00	2.8
41450F	5.0	16.1	72.4	80.0	4.70	4.70	3.8
41460F	6.0	18.1	82.7	90.0	5.00	5.00	3.7
41480F	8.0	26.1	91.7	98.9	—	—	3.6
41482F	10.0	30.2	104.8	112.0	—	—	3.4
41484F	12.0	36.2	130.6	137.0	—	—	3.2
41486F	14.0	42.2	132.2	138.9	—	—	3.4

*Specify "F" for flanged, "P" for pipe threads.
Drains are standard on all silencers with a 9" body diameter or larger.
Specifications are subject to change without notice; all dimensions are in inches.