


Type 4

Engine Exhaust Silencers

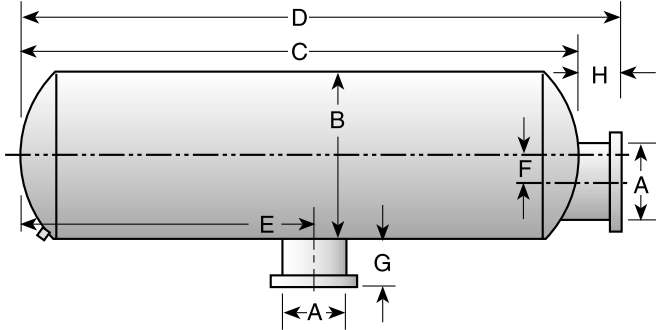

Middle Side-In, End-Out Design

- Industrial Grade**
12–18 dB attenuation
- Residential Grade**
18–25 dB attenuation
- Critical Grade**
25–35 dB attenuation
- Hospital Grade**
35–42 dB attenuation

| Part Number | A Nominal Inlet Diameter | B Outside Body Diameter | C Body Length | D Overall Length | E Offset to C/L | F Offset to C/L | G Inlet Length | H Outlet Length |
|-------------|--------------------------------|-------------------------------|---------------------|------------------------|-----------------------|-----------------------|----------------------|-----------------------|
| 44540F | 4.0 | 9.0 | 32.8 | 35.4 | 16.4 | — | 3.0 | 2.6 |
| 44550F | 5.0 | 12.1 | 30.3 | 34.2 | 15.2 | — | 4.0 | 3.8 |
| 44560F | 6.0 | 14.1 | 30.6 | 34.5 | 15.3 | — | 4.0 | 3.9 |
| 44580F | 8.0 | 18.1 | 48.6 | 53.3 | 24.5 | — | 4.0 | 4.7 |
| 44582F | 10.0 | 22.2 | 50.6 | 54.3 | 25.3 | — | 4.0 | 3.7 |
| 44584F | 12.0 | 26.2 | 49.8 | 53.4 | 24.9 | 6.5 | 4.0 | 3.6 |
| 44586F | 14.0 | 36.2 | 70.6 | 73.8 | 35.3 | — | 4.0 | 3.2 |
| 44640F | 4.0 | 10.1 | 49.2 | 52.1 | 24.6 | — | 3.0 | 2.9 |
| 44650F | 5.0 | 14.1 | 43.6 | 47.5 | 21.8 | 2.6 | 4.0 | 3.9 |
| 44660F | 6.0 | 14.1 | 57.6 | 61.5 | 28.8 | 3.1 | 4.0 | 3.9 |
| 44680F | 8.0 | 22.1 | 54.6 | 58.3 | 26.3 | — | 4.0 | 3.7 |
| 44682F | 10.0 | 22.1 | 84.6 | 88.2 | 42.3 | — | 4.0 | 3.6 |
| 44684F | 12.0 | 26.1 | 79.5 | 83.4 | 39.9 | — | 4.0 | 3.6 |
| 44686F | 14.0 | 36.2 | 88.7 | 91.9 | 44.3 | — | 4.0 | 3.2 |
| 44740F | 4.0 | 12.1 | 58.4 | 61.2 | 29.2 | 1.8 | 3.0 | 2.8 |
| 44750F | 5.0 | 14.1 | 63.6 | 67.5 | 31.8 | 2.6 | 4.0 | 3.9 |
| 44760F | 6.0 | 16.1 | 72.0 | 76.4 | 36.0 | 3.1 | 4.0 | 4.4 |
| 44780F | 8.0 | 22.1 | 78.7 | 82.3 | 39.3 | — | 4.0 | 3.6 |
| 44782F | 10.0 | 26.2 | 79.9 | 83.4 | 39.9 | — | 4.0 | 3.5 |
| 44784F | 12.0 | 30.2 | 104.8 | 108.4 | 52.4 | — | 4.0 | 3.6 |
| 44786F | 14.0 | 42.2 | 108.2 | 111.5 | 54.1 | — | 4.0 | 3.3 |
| 44840F | 4.0 | 14.1 | 66.5 | 69.2 | 33.3 | 4.0 | 3.0 | 2.7 |
| 44850F | 5.0 | 16.1 | 72.4 | 76.2 | 36.2 | 4.7 | 4.0 | 3.8 |
| 44860F | 6.0 | 18.1 | 82.6 | 86.3 | 41.3 | 5.0 | 4.0 | 3.7 |
| 44880F | 8.0 | 26.2 | 91.9 | 95.5 | 46.0 | — | 4.0 | 3.6 |
| 44882F | 10.0 | 30.2 | 104.8 | 108.2 | 52.4 | — | 4.0 | 3.4 |
| 44884F | 12.0 | 36.2 | 130.6 | 133.9 | 65.3 | — | 4.0 | 3.3 |
| 44486F | 14.0 | 42.2 | 132.2 | 135.6 | 66.1 | — | 4.0 | 3.4 |

Drains are standard on all silencers with a 9" body diameter or larger.
Specifications are subject to change without notice; all dimensions are in inches.